

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

(10) International Publication Number  
WO 02/025826 A3

PCT

(51) **International Patent Classification<sup>7</sup>:** H04B 1/16, H04Q 7/32, H04L 12/28

(21) **International Application Number:** PCT/EP01/10302

(22) **International Filing Date:**  
7 September 2001 (07.09.2001)

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) **Priority Data:**  
09/667,505 22 September 2000 (22.09.2000) US

(71) **Applicant (for all designated States except US):** TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).

(72) **Inventor; and**

(75) **Inventor/Applicant (for US only):** HAARTSEN, Jacobus, C. [NL/NL]; Bruchterweg 81, NL-7772 BG Hardenburg (NL).

(74) **Agent:** BENGTTSSON, Peggy; Ericsson Mobile Communications AB, IPR Department, S-221 83 Lund (SE).

(81) **Designated States (national):** AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, (utility model), SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**  
— with international search report

(88) **Date of publication of the international search report:**  
14 November 2002

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— with international search report

**(88) Date of publication of the international search report:**  
14 November 2002

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(54) Title:** SLEEP MODES IN PEER-TO-PEER COMMUNICATIONS

**(57) Abstract:** A system and method for conserving power in a radio communication network wherein a radio receiver periodically scans for a transmitted signal. If a signal is not received after a predetermined period of time, the period between scans is increased. In a multi-unit system, the scan periods are offset from an absolute time reference to prevent more than one unit from transmitting at the same time.

WO 02/025826 A3

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/10302

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 H04B1/16 H04Q7/32 H04L12/28

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols).

IPC 7 H04Q H04L H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 5 627 882 A (BUT CHIU-HONG ET AL) 6 May 1997 (1997-05-06) abstract column 6, line 49 -column 7, line 62 figures 4-13  -/-	14-17  1-13,18

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

11 July 2002

Date of mailing of the international search report

18/07/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Tzimeas, K

## INTERNATIONAL SEARCH REPORT

Internat. Application No

PCT/EP 01/10302

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>GARG S ET AL: "MAC SCHEDULING POLICIES FOR POWER OPTIMIZATION IN BLUETOOTH: A MASTER DRIVEN TDD WIRELESS SYSTEM" VTC 2000-SPRING. 2000 IEEE 51ST. VEHICULAR TECHNOLOGY CONFERENCE PROCEEDINGS. TOKYO, JAPAN, MAY 15-18, 2000. IEEE VEHICULAR TECHNOLOGY CONFERENCE, NEW YORK, NY: IEEE, US, vol. 1 OF 3. CONF. 51, 15 May 2000 (2000-05-15), pages 196-200, XP000970607 ISBN: 0-7803-5719-1 the whole document</p>	1-18
A	<p>US 5 301 225 A (FURUYA TSUNEO ET AL) 5 April 1994 (1994-04-05) abstract column 3, line 59 -column 5, line 3 figures 1,4,5</p>	1-18

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/10302

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5627882	A	06-05-1997	EP	0627836 A2	07-12-1994
			JP	6350508 A	22-12-1994
			SG	52448 A1	28-09-1998
US 5301225	A	05-04-1994	JP	2796464 B2	10-09-1998
			JP	5183487 A	23-07-1993

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 March 2002 (28.03.2002)

PCT

(10) International Publication Number  
**WO 02/25826 A2**

(51) International Patent Classification<sup>7</sup>: **H04B 1/16**  
(21) International Application Number: PCT/EP01/10302  
(22) International Filing Date:  
7 September 2001 (07.09.2001)  
(25) Filing Language: English  
(26) Publication Language: English  
(30) Priority Data:  
09/667,505 22 September 2000 (22.09.2000) US  
(71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET LM ERICKSSON (publ)**  
[SE/SE]; S-126 25 Stockholm (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EC, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and  
(75) Inventor/Applicant (for US only): **HAARTSEN, Jacobus, C.** [NL/NL]; Bruchterweg 81, NL-7772 BG Hardenburg (NL).  
(74) Agent: **BENGTTSSON, Peggy**; Ericsson Mobile Communications AB, IPR Department, S-221 83 Lund (SE).

**Published:**

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 02/25826 A2

(54) Title: SLEEP MODES IN PEER-TO-PEER COMMUNICATIONS

(57) Abstract: A system and method for conserving power in a radio communication network wherein a radio receiver periodically scans for a transmitted signal. If a signal is not received after a predetermined period of time, the period between scans is increased. In a multi-unit system, the scan periods are offset from an absolute time reference to prevent more than one unit from transmitting at the same time.

## Sleep Modes in Peer-to-Peer Communications

## BACKGROUND

The present invention relates to electronic communication systems and, more particularly, to sleep modes in asynchronous data communication schemes.

In the last decades, progress in radio and VLSI technology has fostered widespread use of radio communications in consumer applications. Mobile radios and other portable devices are common consumer devices.

Presently, the primary focus of wireless communication technology is on voice communication. This focus will likely expand in the near future to provide inexpensive radio equipment which can be easily integrated into mobile and stationary devices. For instance, radio communication can be used to create wireless data links and thereby reduce the number of cables used to connect electronic devices. Recently, a new radio interface called Bluetooth was introduced to replace the cables used to connect laptop computers, headsets, PDAs, and other electronic devices. Some of the implementation details of Bluetooth are disclosed in this application, while a detailed description of the Bluetooth system can be found in "BLUETOOTH - The universal radio interface for *ad hoc*, wireless connectivity," by J.C. Haartsen, Ericsson Review No. 3, 1998.

Radio communication systems for personal use differ significantly from radio systems like the public mobile phone network. Public mobile phone networks use a licensed band which is fully controlled by the network provider and guarantee a substantially interference-free channel.

In contrast, personal radio communication equipment operates in an unlicensed spectral band and must contend with uncontrolled interference. One such band is the globally-available ISM (Industrial, Scientific, and Medical) band at 2.45 GHz. The band provides 83.5 MHz of radio spectrum. Since the ISM band is open to anyone, radio systems operating in this band must cope with several unpredictable sources of interference, such as baby monitors, garage door openers, cordless phones, and microwave ovens. Interference can be avoided using an adaptive scheme that finds an unused part of the spectrum. Alternatively, interference can be suppressed by means of spectrum spreading. In the U.S., radios operating in the 2.45 GHz ISM band are required to apply spectrum-spreading techniques if their transmitted power levels exceed about 0 dBm.



Bluetooth radios use a frequency-hop/time-division-duplex (FH/TDD), spread spectrum access scheme. This radio technology supports low-cost, low-power implementations.

Frequency-hop systems divide the frequency band into several hop channels. During a connection, radio transceivers hop from one channel to another in a pseudo-random fashion.

- 5 The instantaneous (hop) bandwidth is small in frequency-hop radios, but spreading is usually obtained over the entire frequency band. This results in low-cost, narrowband transceivers with strong immunity to interference. Occasionally, interference jams a hop channel, causing faulty reception. When this occurs, error-correction schemes in the link can recover lost data.

The channel is divided into time slots, or intervals of 625  $\mu$ s, wherein a different hop  
10 frequency is used for each slot. This results in a nominal hop rate of 1,600 hops per second. One packet can be transmitted per interval/slot. Subsequent slots are alternately used for transmitting and receiving, which results in a TDD scheme.

The channel makes use of several, equally spaced, 1 MHz hops. With Gaussian-shaped frequency shift keying (FSK) modulation, a symbol rate of 1 Mbit/s can be achieved. In  
15 countries where the open band is 80 MHz or broader, 79 hop carriers have been defined. On average, the frequency-hop sequence visits each carrier with equal probability.

Bluetooth radio communications are based on peer communications and ad-hoc networking. In peer communications, all units are equal and a hierarchical network with a fixed infrastructure of base stations and portable terminals is not required. There is no centralized  
20 control that provides resource and connection management and other support services. In ad-hoc networks, which are usually based on peer communications, any unit can establish a connection to any other unit within range.

One application for Bluetooth-enabled communication units is the replacement of cables that connect computing or communication devices, such as computers, printers, mobile  
25 terminals, and the like. For systems such as Bluetooth to replace cables, data traffic over the radio interface must be very flexible. The enabling protocol must support both symmetric and asymmetric traffic flows and synchronous and asynchronous clocking schemes. In Bluetooth, a flexible communication channel is achieved using a slot structure without an overriding multi-slot frame structure. Bluetooth divides the time domain into slots and Bluetooth-enabled units  
30 are free to allocate the slots as necessary for transmission or reception.

As in other mobile radio communication systems, one important issue in peer-to-peer and

ad-hoc communications is power conservation in mobile terminals. Since the radio communication typically takes place between portable and mobile equipment, low power consumption is essential to preserve battery life.

In communication networks, like cellular networks, low power modes are supported by the control channels of the network base stations. Such power conservation schemes are described in U.S. Patent No. 5,794,146 to Sevcik et al., U.S. Patent No. 5,758,278 to Lansdowne, commonly-assigned U.S. Patent No. 5,883,885 to Raith, and International Patent Publication No. WO 00/04738. The base stations are typically fixed and not subject to power limitations. Once the terminal is synchronized to the base station, the terminal can enter a very low power mode. While in a low power mode, the terminal periodically scans for a signal from the base station, with each scan lasting for a short period of time. The base station, which is not constrained by power limitations, can broadcast the control channel or beacon continuously. The terminal can reduce its standby power considerably without sacrificing response time. Similar techniques are used on cellular asynchronous data channels, such as General Packet Radio Service (GPRS), which uses a control channel to schedule packet deliveries. A method of power conservation in a battery-operated, portable device is also described in European Patent Publication No. EP 0 944 273 A1.

Ad-hoc radio communications schemes like Bluetooth lack a control channel concept. Reducing power consumption while the device is in idle mode (i.e., not connected) has been described in commonly assigned U.S. Patent No. 5,940,431 entitled "Access Technique of Channel Hopping Communications System," to J.C. Haartsen and P.W. Dent, the disclosure of which is incorporated here by reference. However, reducing power consumption while terminals are connected but during pauses between asynchronous data bursts presents technical problems that are not trivial, particularly when both units have to minimize power consumption.

Accordingly, there is a need in the art for a system and method to reduce power consumption in radio units engaged in asynchronous data services. More particularly, there is a need for a system and method that allows the radio units to enter a sleep mode without requiring extra overhead.

## SUMMARY

In peer-to-peer radio communications supporting asynchronous services, it is desired to reduce the power consumption in mobile terminals during pauses between data bursts. When there is no traffic on the channel for a predetermined amount of time, the units enter a low duty cycle sleep mode in which they sleep most of the time and wake up periodically, with a period  $T$ , to scan the channel for a brief time. A unit can restart communications only at specific points in time which relate to the sleep period  $T$ . The scan cycle of one unit preferably corresponds to the restart cycle of the other unit. If, for several sleep cycles, traffic does not return,  $T$  can be increased. This process may be carried out in both units, but without the units communicating to each other when the adaptation occurs. Since the two units may not update  $T$  exactly at the same time,  $T$  cannot be varied in an arbitrary fashion and cannot be based on relative timing. Instead, the scan time is based on absolute timing. Switching from one sleep/scan period to another sleep/scan period is allowed only at predetermined points in time. To prevent collisions when both units want to restart communications, the scan/restart cycles should be staggered. Once communication has restarted, the sleep mode is left. Only a predetermined period of silence on the channel can force the unit(s) into the sleep mode, starting with the smallest  $T$ .

In accordance with the present invention, there is a system for conserving power in a portable radio device. The system includes a first unit having at least a transmitter, a second unit having at least a receiver, and a communication channel through which the first unit and the second unit can communicate. Each receiver is activated for a period of time to enable the unit to receive a signal followed by a period of time in which the receiver is deactivated and the unit is unable to receive the signal. A first timing means is associated with the first unit and a second timing means associated with a second unit. Each timing means is used to measure an amount of elapsed time since the signal was last received. The system includes a plurality of time thresholds wherein the period of time for which the receiver is deactivated is increased by a time interval associated with one of the plurality of time thresholds when the amount of elapsed time exceeds the time threshold.

In accordance with another aspect of the present invention, the first unit transmits a signal to the second unit to initiate communications. The signal is transmitted more than one time. A time interval between successive attempts by the transmitter to initiate communications is determined by the amount of elapsed time since the last communication with the second unit.

The time interval is associated with a time threshold exceeded by the amount of elapsed time since the last communication.

In accordance with another aspect of the present invention, there is a system for conserving power in a portable radio network. The system includes a plurality of  
5 communication devices wherein at least one of the communication devices has a transmitter and at least one of the communication devices has a receiver. There is a communication channel through which the plurality of communication devices can communicate. Each receiver is activated for a period of time to enable the communication device to receive a signal followed by a period of time in which the receiver is deactivated and the communication device is unable to  
10 receive a signal. A first timing means is associated with one of the plurality of communication devices and a second timing means is associated with another of the plurality of communication devices. Each timing means is used to measure an amount of elapsed time since the signal was last received. The system includes a plurality of time thresholds wherein the period of time for which the receiver is deactivated is increased by a time interval associated with one of the  
15 plurality of time thresholds when the amount of elapsed time exceeds the time threshold.

In accordance with another aspect of the present invention, there is a method for conserving power in a portable radio device. The method comprises the steps of measuring a period of elapsed time beginning with the end of a transmission; comparing the period of elapsed time with a threshold; increasing a time period between successive activations of a radio  
20 transmitter if the elapsed time exceeds a threshold period; and increasing a time period between successive activations of a radio receiver if the elapsed time exceeds a threshold period.

In accordance with another aspect of the present invention, there is a communication system including a first communication device having at least a transmitter, a second communication device having at least a receiver, and a communication channel through which  
25 the first communication device and the second communication device can communicate. Each receiver is activated for a period of time to enable the communication device to receive a signal followed by a period of time in which the receiver is deactivated and the communication device is unable to receive a signal. A first timing means is associated with the first communication device and a second timing means associated with a second communication device. Each timing  
30 means is used to measure an amount of elapsed time since the signal was last received. A plurality of time thresholds wherein the period of time for which the receiver is deactivated is

increased by a time interval associated with one of the plurality of time thresholds when the amount of elapsed time exceeds the time threshold.

In accordance with another aspect of the present invention, there is a communication device which includes a receiver capable of interfacing with a communication channel through which the communication device can receive a signal. The receiver is activated for a period of time to enable the communication device to receive a signal followed by a period of time in which the receiver is deactivated and the communication device is unable to receive a signal. A timing means is associated with the communication device wherein the timing means is used to measure an amount of elapsed time since the signal was last received. The timing means compares the amount of elapsed time with a plurality of time thresholds wherein the period of time for which the receiver is deactivated is increased by a time interval associated with one of the plurality of time thresholds when the amount of elapsed time exceeds the time threshold.

In accordance with another aspect of the present invention, there is a method of operating a communication system having a transmitting device, a receiving device, a first timing means associated with the transmitting device, a second timing means associated with the receiving device, and a communication channel through which the transmitting device transmits a signal to the receiving device. The method comprising the steps of activating the receiving device at periodic intervals; increasing the period between successive activations of the receiving device based on an elapsed time since the last communication with the transmitting device; activating the transmitting device at periodic intervals to establish communication with the receiving device; and adjusting the period between successive activations of the transmitting device to coincide with the periods of activation of the receiving device.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic depiction of a timing diagram of a slotted time-division-duplex communication channel with asynchronous traffic flow;

Fig. 2 is a schematic depiction of a timing diagram that illustrates entering a low-power mode according to the present invention;

Fig. 3 is a schematic depiction of a timing diagram that illustrates a staggered start-restart timing scheme for two units according to the present invention;

Fig. 4 is a schematic depiction of a timing diagram that illustrates staggered scan/restart

timing schemes for multiple devices according to the current invention;

Fig. 5 is a schematic depiction of a timing diagram that illustrates several scan/restart timing schemes according to the present invention;

Fig. 6 is a schematic depiction of a timing diagram that illustrates switching between several scan/restart timing schemes according to the present invention;

Fig. 7 is a flow diagram illustrating operation of sleep modes; and

Fig. 8 is a schematic depiction of a timing diagram that illustrates non-aligned switching between several scan/restart timing schemes according to the present invention.

## DETAILED DESCRIPTION

In the following description, the invention is described in terms of a Bluetooth communication system, but it will be understood that Applicant's invention is not so limited. The invention is broadly applicable to peer-to-peer communication networks and can be embodied in other types of communication systems that have appropriate features.

Fig. 1 depicts a timing diagram of an ideal slotted, packet-based radio interface between two peer units, A and B. Packets 100 start at a slot boundary 102 and can last for a generally unrestricted period of time 104. As shown in Fig. 1, unit A transmits packet 100a beginning at slot boundary 102a and lasting for a duration 104a. Likewise, packet 100b begins at slot boundary 102b and lasts for a duration 104b. In this example, packet 100b has a shorter duration than packet 100a. As can be appreciated, unit B transmits its packets 100e, 100f, 100g, and 100h beginning at respective slot boundary 102e, 102f, 102g, and 102h. By design, unit A and unit B do not transmit at the same time.

Bluetooth implements a variation of this type of channel, in which the packet length can vary and the packet can occupy between one and five slots. Preferably, a priority scheme exists among the units so that each unit knows when it is permitted to transmit on the channel. Such a scheme is described in commonly-assigned U.S. Patent Application \_\_\_\_\_, entitled "Method and Apparatus for Medium Access on a Radio Channel," filed August 8, 2000, claiming priority from U.S. Provisional Patent Application No. 60/180, 095, incorporated herein by reference. In this priority scheme, timeslots are defined at regular intervals and the units are allowed to start transmission unconditionally. Each unit will have a different priority timeslot assigned, thereby preventing collisions due to simultaneous transmissions. Since there is no

distinct uplink and downlink in peer communications, time division duplexing (TDD) is preferably used. In a TDD-enabled system, only one unit transmits while all other units listen. When the first unit has finished transmitting (either because it has transmitted its full message or it has transmitted for the maximum allowed time), the first unit releases the communication channel and other units are allowed to transmit. Using TDD obviates the need for expensive duplexers in radio transceiver equipment. TDD also simplifies the integration of a transmitter and a receiver on a single chip, since both sections of the chip never operate simultaneously. Accordingly, using TDD results in cost-effective equipment.

As shown in Fig. 2, if the channel is idle for a period of time, the radio transceivers enter a low-power "sleep" mode and occasionally wake up to listen to the channel to see if communications have resumed. To determine when to enter a sleep mode, each unit begins measuring a time-out period once the unit is idle (i.e., not transmitting or receiving). If the unit resumes transmitting or receiving during the time-out period, then the time-out period restarts once communication ceases. When the time-out period has elapsed, the unit enters a low-power mode.

A unit wishing to resume communications may need to determine the timing of the sleep interval of a unit in low power mode, so that the unit can determine when the low-power unit is scanning and can be activated. In addition, the unit will need to determine when the unit is permitted to transmit. Accordingly, the scan cycle (indicating the periods when a unit is scanning) of one unit should be aligned with the restart cycle (indicating the periods when a unit may transmit to restart communication with another unit) of the other unit. The time position  $t=t_1$ , during which the scan starts in one unit, and the time position  $t=t_2$ , during which the restart operation starts in the other unit, should be aligned, and preferably is based on an absolute time  $t$  given by:

$$t \bmod T_{\text{sleep}} = \text{offset} \quad (1)$$

where  $T_{\text{sleep}}$  is the interval between two consecutive scan periods.

Ideally, the period of the scan cycle is the same as the period of the restart cycle. The *offset* value is a time offset which is preferably smaller than  $T_{\text{sleep}}$ . Each unit preferably has a different *offset* value to prevent two units from trying to restart at the same time. The *offset* is

preferably referenced to an absolute time. The absolute time is known by both units, provided they are synchronized. Bluetooth, for example, requires time synchronization between the participating units to implement a frequency hopping scheme.

Fig. 2 illustrates how two units A and B enter low-power mode after a time out period during which no communication has taken place. Because the scan/restart cycle is based on absolute time, the units need not enter the low-power "sleep" mode at the same time. In Fig. 2 it is assumed that only unit A can restart communications. In real peer-to-peer communications, each unit can restart communications and both should be scanning and have potential restart positions.

To prevent both units from simultaneously attempting to resume communications, the scan cycle of one unit should be staggered in time with respect to the scan cycle of another unit, as shown in Fig. 3. This is accomplished by choosing the *offset* value in equation 1 properly. For example, the group of *offset* values may be an orthogonal set, thereby ensuring that no two units will transmit at the same time. If several units on the channel enter sleep mode, each unit should have a different *offset* value. The staggering offset could be negotiated at connection setup and may depend on a variety of factors, such as the unit's address. If more than two units are involved, the potential restart positions corresponding to the priority slots should be staggered to prevent simultaneous transmissions and data collisions. On a potential restart position of unit  $i$ , all units  $j$  (where  $j \neq i$ ) scan to check whether unit  $i$  wants to resume communication. The restart and scan cycles would relate to each other as illustrated in Fig. 4 for three users. As can be appreciated, if the *offset* values are sufficiently small, a single scan duration could encompass the potential restart opportunities of all of the units, allowing the unit to sleep for a longer duration of time.

The sleep mode schemes illustrated in Fig. 1 through Fig. 3 have a fixed sleep interval  $T_{sleep}$ . The choice of  $T_{sleep}$  depends on a trade-off between power consumption and latency. Increasing  $T_{sleep}$  results in a lower duty cycle and therefore a lower power consumption. But during  $T_{sleep}$ , the unit cannot be activated and the response time or latency (defined as the interval between the time when one unit wants to activate a unit in sleep mode and the time the sleeping unit responds) increases. A fixed value can be chosen for  $T_{sleep}$  if the latency requirements are fixed. Latency may depend on a variety of factors, such as the application, traffic conditions, and may even vary in time.



For example, an application with a mouse or a pointer requires a very small latency when the user is handling (i.e., moving) the mouse. While at work, short movements are alternated by periods of idleness. The response time during these periods of idleness should be short since the user should not experience any delay while at work (although "at work" does not mean he continuously moves the mouse). However, if the user leaves his work place for a while and then returns, the response time may have grown much longer during the time of absence. The user will accept a long delay the first time he moves the mouse again, as long as the delay is reduced while he is working. In general, a response time which increases when the idle time increases is acceptable, provided the maximum delay is limited and the response time reduces to a short period as soon as work is resumed.

In bursty communication systems, the same kind of procedures can be followed. Dynamically changing  $T_{sleep}$  facilitates balancing power consumption and latency at any moment in time. One crucial aspect is that the scan cycles and restart cycles remain aligned. As  $T_{sleep}$  varies, both units should change their timing, preferably at approximately the same time. In addition, the timing change must be accomplished without the units exchanging information.

In the following description, only two units are considered. However, the procedure can easily be extended to more than two units. The procedure is based on a sleep/scan cycle which includes several substates with fixed relative time relationships. The first substate ST1 has the highest duty cycle and the shortest sleep interval. The time interval between two consecutive scan periods in this first substate is  $T_1$ . The second substate ST2 has a time interval between consecutive scan periods which is  $T_2 = N_2 \times T_1$  where  $N_2$  is an integer and  $T_1$  the interval of substate ST1. The third substate ST3 has an inter-scan interval  $T_3 = N_3 \times T_2 = N_3 \times N_2 \times T_1$ . In general, substate ST $k$  has an inter-scan interval of  $T_k = N_k \times T_{k-1}$ .

Fig. 5 illustrates an example of a timing scheme with four substates corresponding to the case where  $N_4 = N_3 = N_2 = 2$ . In this case, the duty cycle is reduced exponentially when going to a higher substate. The substates are all aligned, which means that all scan periods of substate ST $k$  occur at the same time as some of the scan periods of substate ST $k-1$ . Since ST $k-1$  is aligned with ST $k-2$  and so on, all higher substates are aligned with all lower substates. The substate timing is based on an absolute timing. The scan period of ST $k$  will start at time  $t$

$$t \text{ modulo } T_k = \text{offset} \quad (2)$$

where  $T_k$  is the period in scheme  $ST_k$  and *offset* is a fixed time offset smaller than  $T_k$ .

Fig. 5 shows the scan/sleep cycle. In correspondence with this scheme, there is a restart cycle which is used by a unit that wants to resume communications with the unit in the sleep mode. This restart scheme has exactly the same substates. However, instead of scan periods, the restart scheme indicates the potential restart points where a unit can start transmitting data and resume communications.

Fig. 6 illustrates a timing scheme in which A and B, have established a communication channel. Assume that unit B is a power sensitive device that needs to save as much power as possible. If the channel has been silent for time *Tidle\_1*, then unit B will enter the ST1 low-power state. Unit B will sleep for most of the time, but every  $T_1$  seconds will wake up and scan to determine if unit A has something to send. If the channel is still silent, then unit B will enter the ST2 low power state if the silent period has exceeded *Tidle\_2* seconds (using the same reference as for determining *Tidle\_1*, e.g. the end of the last information packet exchanged on the channel). As shown in Fig. 6, this can continue with *Tidle\_3*, ST3, etc.

Note that for a switch from  $ST_{k-1}$  to  $ST_k$ , *Tidle\_k* is used which is preferably based on the same absolute reference that defined the end of the active state. If each new time out had been based on the previous time out period, then an accumulation of inaccuracies would arise, deteriorating the alignment between the sleep and restart cycles as discussed below.

If there is information on the channel during a scan period, then unit B leaves the low power mode and enters the active state. If the channel becomes idle again, then the sleep-mode timing scheme begins all over again starting with low-power mode ST1.

The activity of unit B is generally described in the flow diagram shown in Fig. 7. The unit begins in the active state. Once the communication channel remains idle for more than *Tidle\_1*, the unit advances to the first substate and begins periodic scans according to the timing diagram in Fig. 6. If the channel remains idle for *Tidle\_2*, then the unit advances to the second substate. This progression through the substates continues as the idle time reaches the threshold for each substate. If the channel becomes active during a scan period, the unit returns to the active state. Accordingly, a subsequent idle period of sufficient duration (i.e., *Tidle\_1*) will cause the unit to again enter the first substate.

Since the low-power scheme is based on absolute timing, unit A can determine when unit B's scan periods occur (provided unit A knows unit B's offset). However, unit A may not know

exactly which substate unit B is operating in. This is because unit A cannot know precisely when unit B determined that the channel was idle and determined when to switch substates. That is, unit A does not track when unit B last transmitted or received a message. Due to communication errors, unit A may assume a reference which is different from the reference used by unit B. However, unit A will know the trend (ST1 to ST2 to ST3 etc.) and the exact scan positions of ST $k$ . Accordingly, unit A can activate unit B, although it may take a little longer than if unit A had knowledge of the substate in which unit B is operating.

Fig. 8a and Fig. 8b illustrate the situation when unit A assumes that unit B is operating in a substate different from the substate unit B is actually operating in. In Fig. 8a, unit A may wait unnecessarily for unit B to wake up during the time that unit B is in ST1 but unit A assumes that unit B is operating in ST2. In Fig. 8b, unit A may transmit unnecessarily since unit B is not scanning as frequently when it is in ST2, but unit A assumes unit B is operating in ST1. Note that this situation only arises for a time period where units A and B use different substates. This time period corresponds to the time offset between the references times used in units A and B, respectively. In another embodiment, unit A may always use ST $k-1$  when it predicts that unit B is in ST $k$ . In this way, the shortest response time for the mode unit A resides in is guaranteed, but at the expense of possible extra transmissions.

The previous scheme is a one-directional procedure between one recipient (unit B in the above example) and an activator (unit A). The procedure can equally well be established in the opposite direction (unit B activator and unit A recipient). The sleep periods  $NxT1$  do not have to be the same in both directions. If they are, preferably, the offset value is chosen differently for each direction so that the schemes are staggered. This means that the restart timing points do not overlap and there is no possibility of a collision when both units want to activate each other. If more than two units are involved, each should choose a different offset value, similar as was shown in Fig. 5.

The invention has been described in accordance with a single preferred embodiment. In light of this disclosure, those skilled in the art will likely make alternate embodiments of this invention. These and other alternate embodiments are intended to fall within the scope of the claims which follow.

It should be emphasized that the term "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps, or components

WO 02/25826

PCT/EP01/10302

but does not preclude the presence or addition of one or more other features, integers, steps, components, or groups thereof.

## CLAIMS

## What Is Claimed Is:

- 5 1. A system for conserving power in a portable radio device comprising:  
a first unit having at least a transmitter;  
a second unit having at least a receiver;  
a communication channel through which the first unit and the second unit can  
communicate, wherein each receiver is activated for a period of time to enable the unit to receive  
10 a signal followed by a period of time in which the receiver is deactivated and the unit is unable  
to receive the signal;  
a first timing means associated with the first unit and a second timing means associated  
with a second unit, each timing means being used to measure an amount of elapsed time since  
the signal was last received; and  
15 " a plurality of time thresholds wherein the period of time for which the receiver is  
deactivated is increased by a time interval associated with one of the plurality of time thresholds  
when the amount of elapsed time exceeds the time threshold.
2. The system of claim 1, wherein the first unit transmits a signal to the second unit to  
20 initiate communications, the signal being transmitted more than one time, a time interval  
between successive attempts by the transmitter to initiate communications being determined by  
the amount of elapsed time since the last communication with the second unit, the time interval  
being associated with a time threshold exceeded by the amount of elapsed time since the last  
communication.
- 25 3. The system of claim 1, wherein the communication channel is a radio frequency band  
employing frequency-hopping and time-division-duplexing.
4. The system of claim 1, wherein the first and second timing means are integral to the first  
30 and second communication devices.

5. The system of claim 1, wherein the first unit further comprises a receiver and the second unit further comprises a transmitter.

6. A system for conserving power in a portable radio network comprising:

5 a plurality of communication devices wherein at least one of the communication devices has a transmitter and at least one of the communication devices has a receiver;

a communication channel through which the plurality of communication devices can communicate, wherein each receiver is activated for a period of time to enable the communication device to receive a signal followed by a period of time in which the receiver is

10 deactivated and the communication device is unable to receive a signal;

a first timing means associated with one of the plurality of communication devices and a second timing means associated with another of the plurality of communication devices, each timing means being used to measure an amount of elapsed time since the signal was last received; and

15 a plurality of time thresholds wherein the period of time for which the receiver is deactivated is increased by a time interval associated with one of the plurality of time thresholds when the amount of elapsed time exceeds the time threshold.

7. The system of claim 6, wherein the communication channel is a radio frequency band  
20 employing frequency-hopping and time-division-duplexing.

8. The system of claim 6, wherein the active period for each receiver is offset in time from a common reference.

25 9. A method for conserving power in a portable radio device comprising the steps of:

measuring a period of elapsed time beginning with the end of a transmission;

comparing the period of elapsed time with a threshold;

increasing a time period between successive activations of a radio transmitter if the elapsed time exceeds a threshold period; and

30 increasing a time period between successive activations of a radio receiver if the elapsed time exceeds a threshold period.

10. A communication system comprising:

a first communication device having at least a transmitter;

a second communication device having at least a receiver;

a communication channel through which the first communication device and the second  
5 communication device can communicate, wherein each receiver is activated for a period of time  
to enable the communication device to receive a signal followed by a period of time in which the  
receiver is deactivated and the communication device is unable to receive a signal;

a first timing means associated with the first communication device and a second timing  
means associated with a second communication device, each timing means being used to

10 measure an amount of elapsed time since the signal was last received; and

a plurality of time thresholds wherein the period of time for which the receiver is  
deactivated is increased by a time interval associated with one of the plurality of time thresholds  
when the amount of elapsed time exceeds the time threshold.

15 11. The system of claim 10, wherein the communication channel is a radio frequency band  
employing frequency-hopping and time-division-duplexing.

12. The system of claim 10, wherein the first and second timing means are integral to the  
first and second communication devices.

20

13. The system of claim 10, wherein the first communication device and the second  
communication device are battery powered.

14. A communication device comprising:

25 a receiver capable of interfacing with a communication channel through which the  
communication device can receive a signal, wherein the receiver is activated for a period of time  
to enable the communication device to receive a signal followed by a period of time in which the  
receiver is deactivated and the communication device is unable to receive a signal;

a timing means associated with the communication device wherein the timing means is  
30 used to measure an amount of elapsed time since the signal was last received; and,

a plurality of time thresholds wherein the period of time for which the receiver is

deactivated is increased by a time interval associated with one of the plurality of time thresholds when the amount of elapsed time exceeds the time threshold.

15. The device of claim 14, wherein the communication channel is a radio frequency band  
5 employing frequency-hopping and time-division-duplexing.

16. The system of claim 14, wherein the timing means is integral to communication device.

17. The system of claim 14, wherein the communication device is battery powered.

10 18. A method of operating a communication system having a transmitting device, a receiving device, a first timing means associated with the transmitting device, a second timing means associated with the receiving device, and a communication channel through which the transmitting device transmits a signal to the receiving device, the method comprising the steps  
15 of:

activating the receiving device at periodic intervals;

increasing the period between successive activations of the receiving device based on an elapsed time since the last communication with the transmitting device;

20 activating the transmitting device at periodic intervals to establish communication with the receiving device; and

adjusting the period between successive activations of the transmitting device to coincide with the periods of activation of the receiving device.



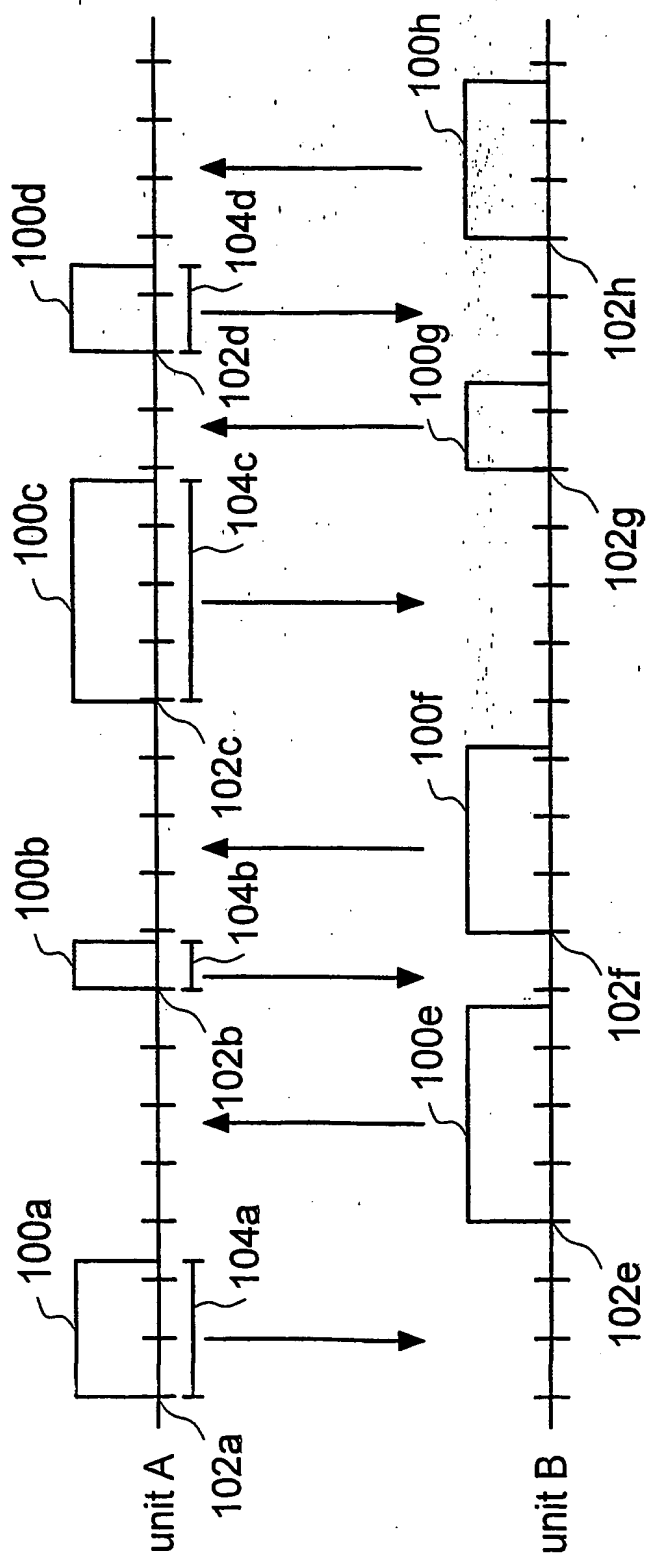


FIG. 1

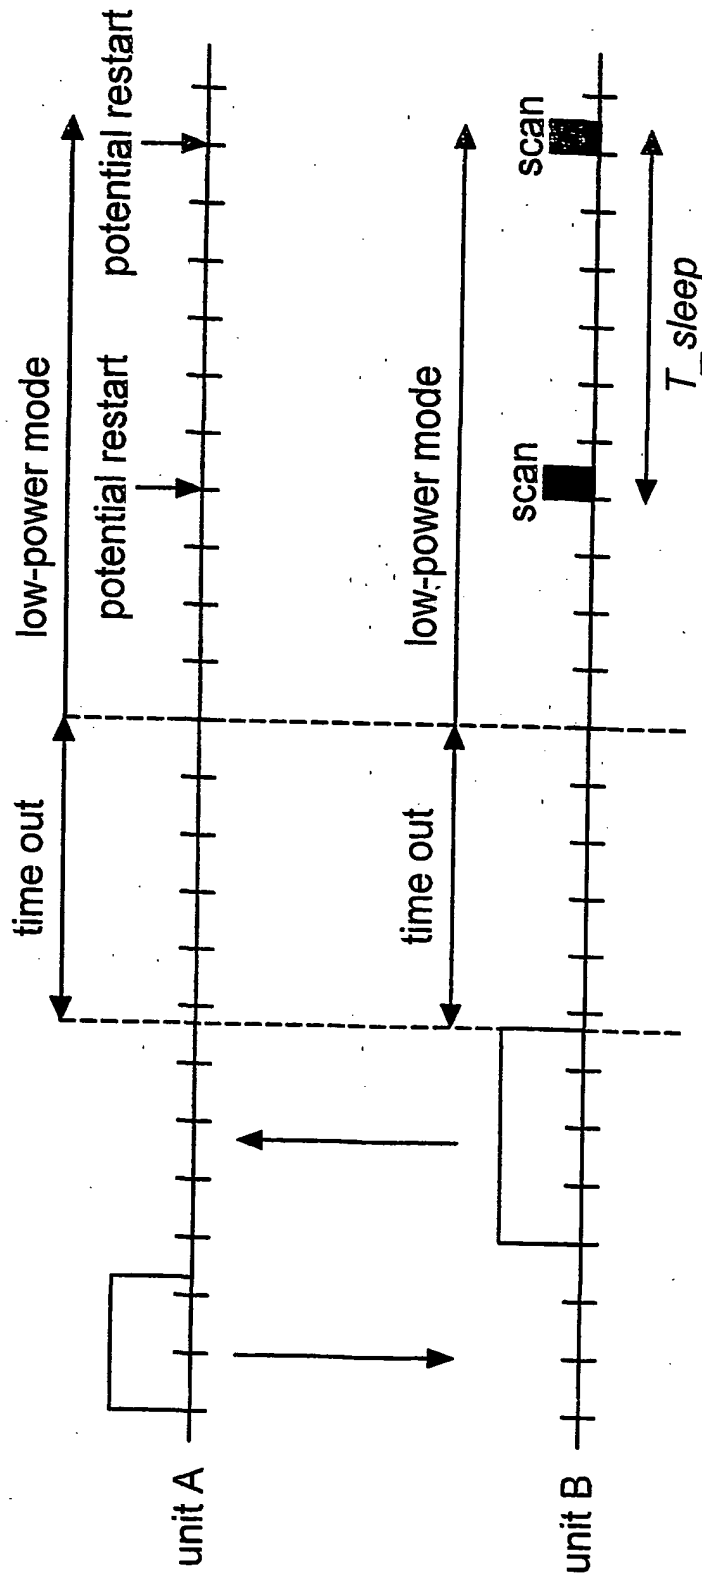


FIG. 2

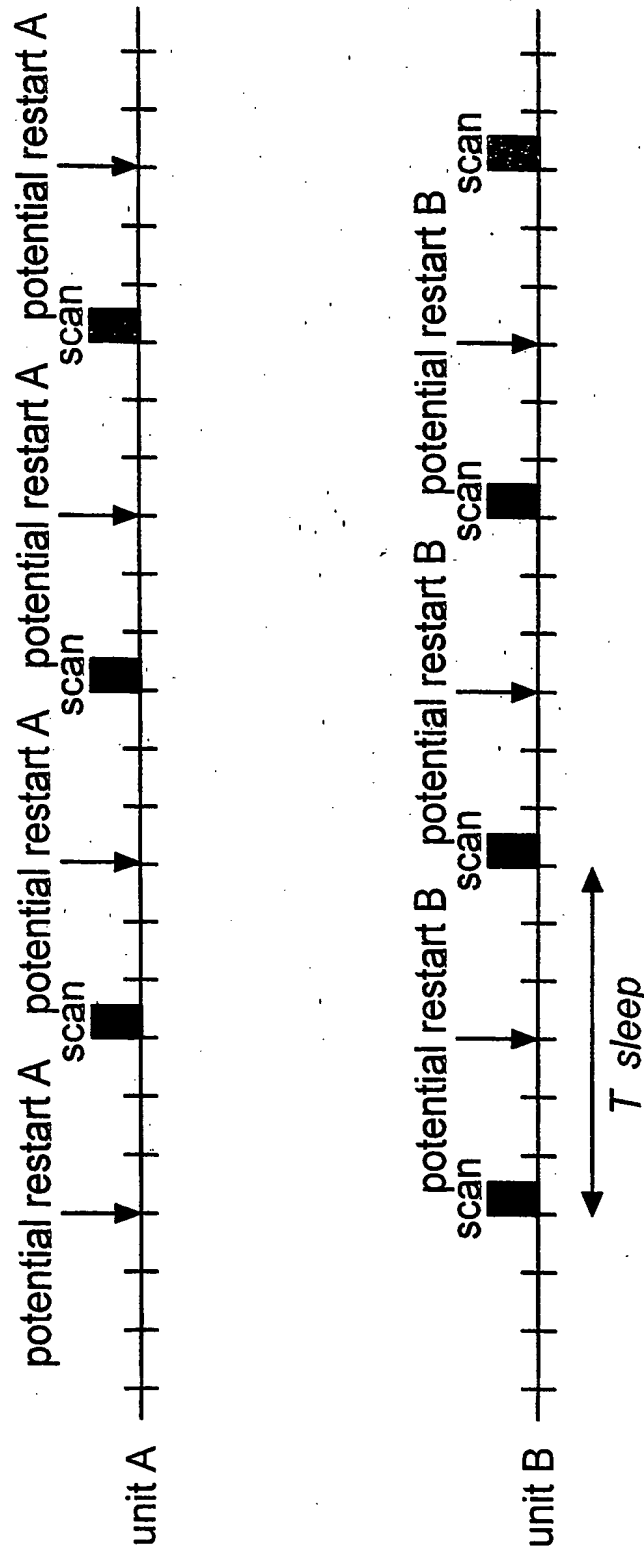


FIG. 3

4/8

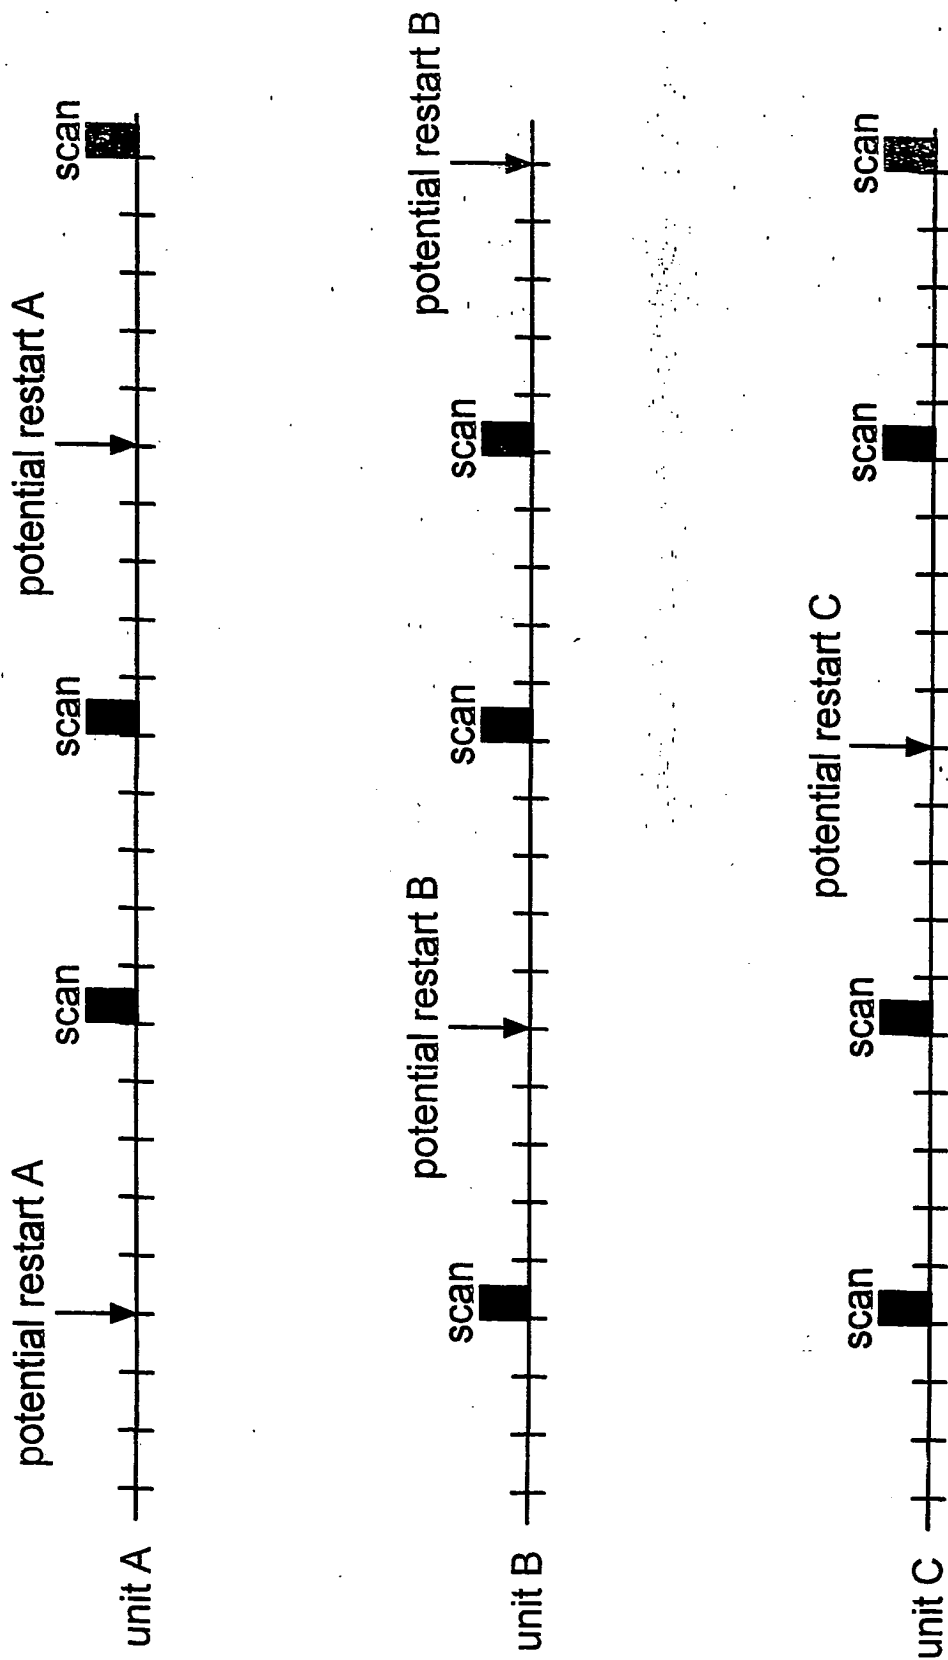


FIG. 4

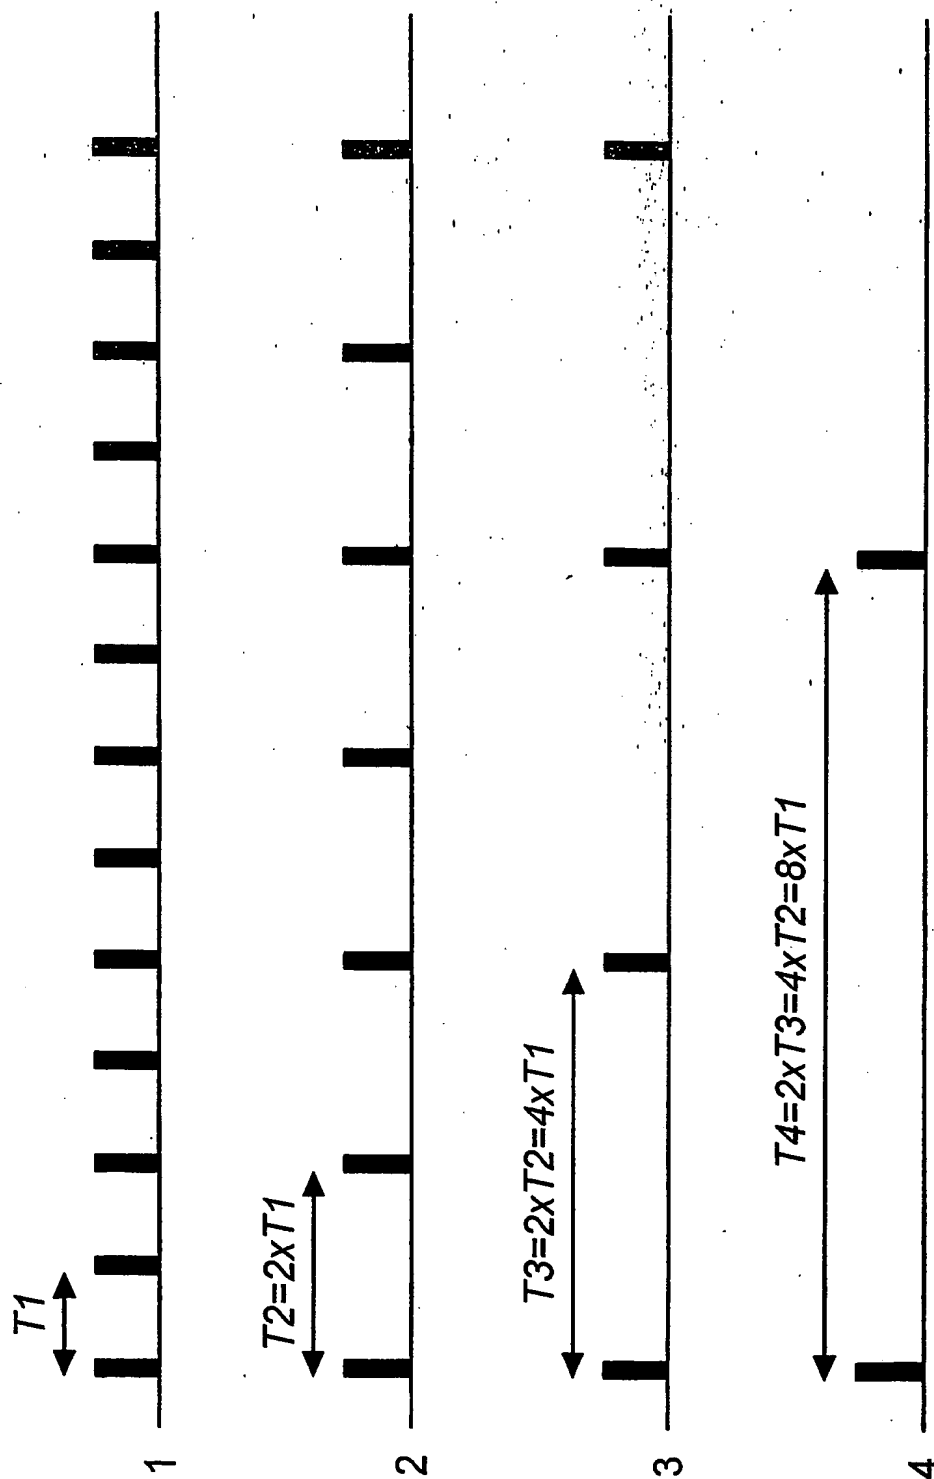


FIG. 5

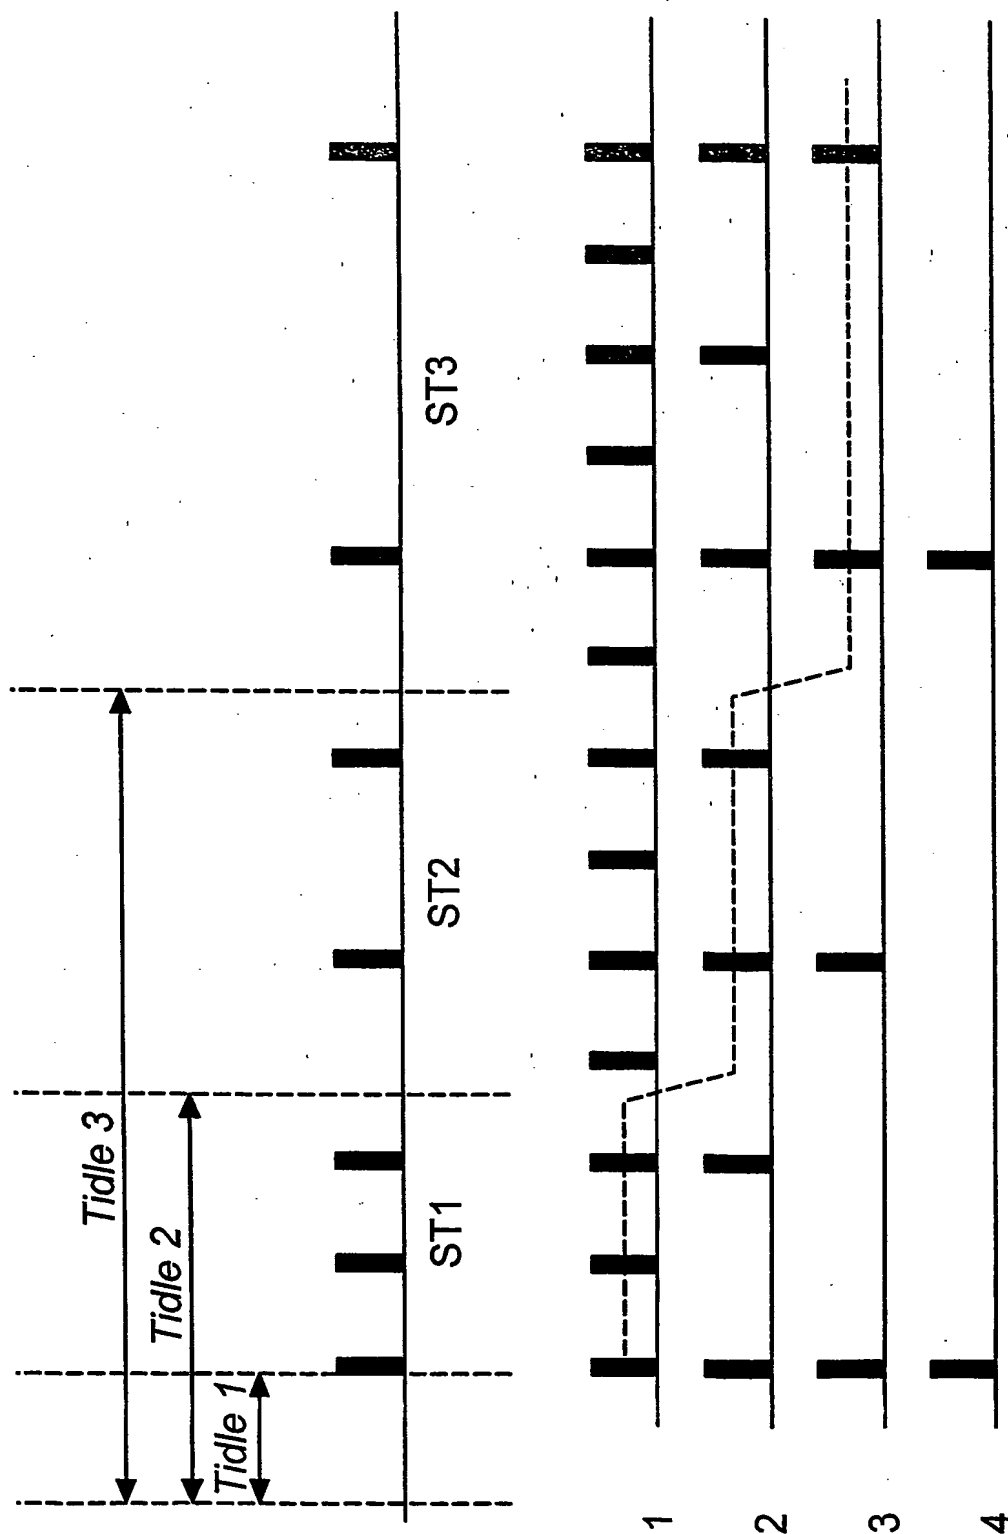


FIG. 6

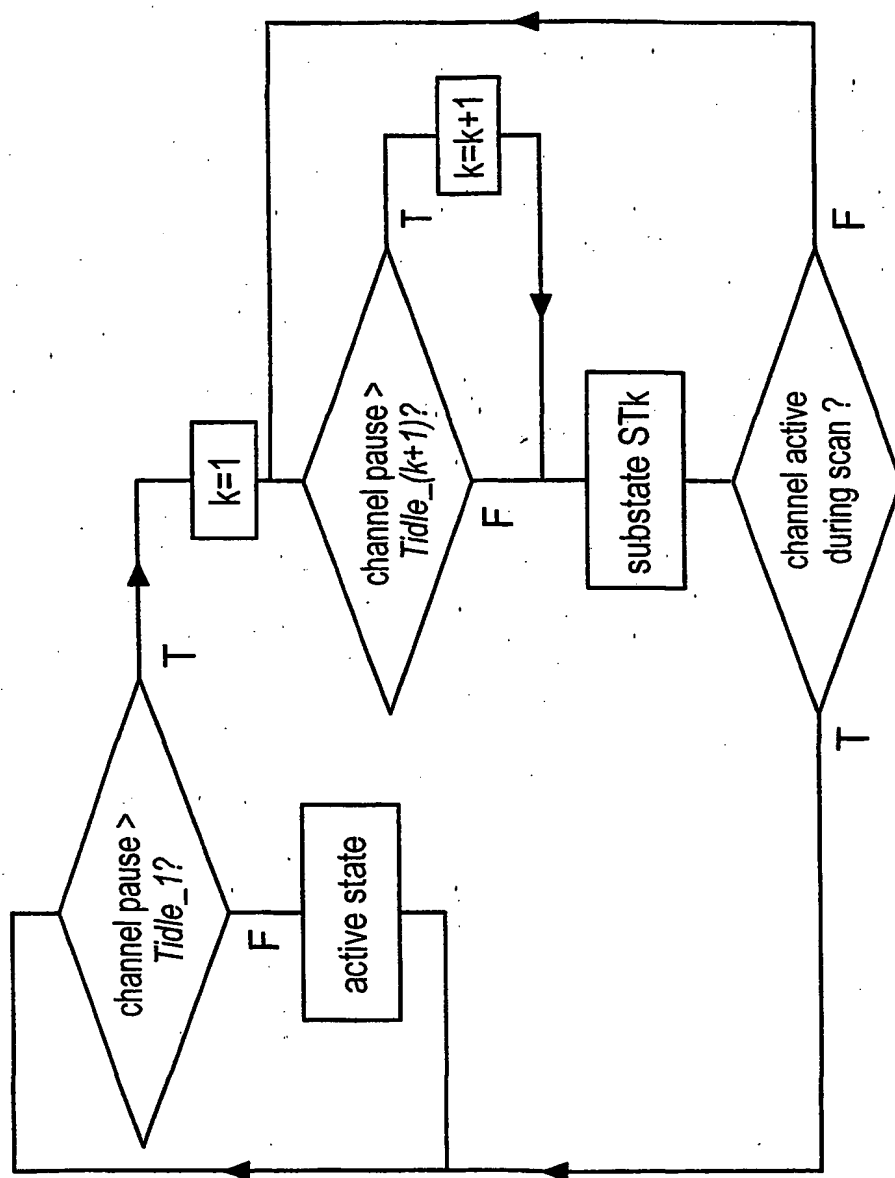


FIG. 7

